


GoldenBeach-525S4

x86 Embedded Platform based on Intel® Atom™ Processor D525

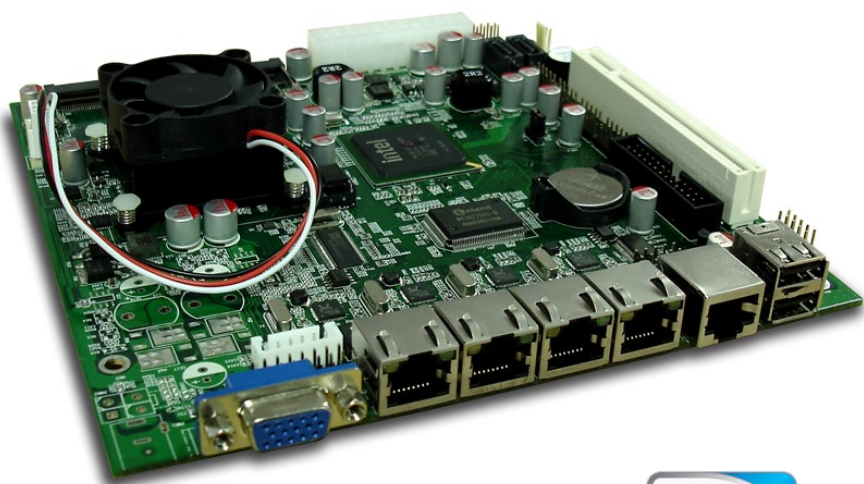

Hardware

Product

Highlight

- Intel® Atom™ processor D525
- Intel® ICH8M Chipset
- Super I/O with Hardware Monitor
- Four Gigabit Ethernet controllers and allow one bypass pair
- One IDE CF slot
- Support Watchdog to prevent system failure
- Mini ITX, 170 x 170 mm

Features	Description	
Processor System	CPU	Intel® Atom™ Processor D525 (Dual CORE)
	Clock Speed	1.8GHz
	FSB	800MHz
	CLK Chip	ICS9LPRS365
	System Chipset	Intel® ICH8M Chipset
	BIOS	SPI Flash 2MB SST25VF016B AMI BIOS
Memory	Type	DDR3-800
	Capacity	Up to 2GB Max.
	Socket	1 x DDR3 SODIMM slot
VGA / LVDS	Integrated VGA 2x8pin header	
Super I/O Chip	1 x WINBOND W83627DHG-B Super IO	
Serial ATA	3 x SATA2 connector (allow up to Max 2), one 22pin Right Angle connector and two standard 7-pin connectors.	
Compact Flash	1 x CF card connector (IDE)	
Serial Port	2 x COM (one RJ45 COM RS232, one 2x5pin header, four by F81216D extension) Optional	
PCI	1 x PCI slot (can extend to 3 PCI)	
Keyboard & Mouse	1 x 6pin (2.54mm) header for keyboard and mouse	
USB	8 x USB2.0 ports, two stacked ports, two 2x5pin (2.54mm)	
HW Monitor	Integrated in the Super I/O chip, support Watchdog	
GPIO	1 x GPIO 2x5pin header	
Audio	ALC662, 2x5pin header, LINE-OUT, MIC, LINE-IN (optional)	
Ethernet	4 x RTL 8111E GbE Controller, support 1 pair ByPass (optional)	
RTC	Support Real Time Clock	
Cooling Fans	Two 3-pin power connectors for CPU and System Fan	
Power	Connector	1 x 20PIN ATX Power Connector or 12V DC Jack
Environment	Operating Temp.	0°C ~ +70°C
Board	Size	170mm x 170mm

Contact Information

Flexcomm Limited (HQ)

Flat 204-205, 2/F Laford Center,
838 Lai Chi Kok Road, Cheung Sha Wan,
Kowloon, Hong Kong.
Tel: +(852)-2303-0711
Fax: +(852)-2317-7522

Shenzhen (China) Branch

Flexcomm Technology (Shenzhen) Limited
13th Floor, SangDa Science and Technology
Building.
No 1 Keji Road, Hi-tech Industrial Park,
Nanshan District, Shenzhen 518057 P.R.
China.
Postal Code: 518057
Tel: +(86)-755-8631-6396 / 8631-6325



Product specifications, size and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.

